
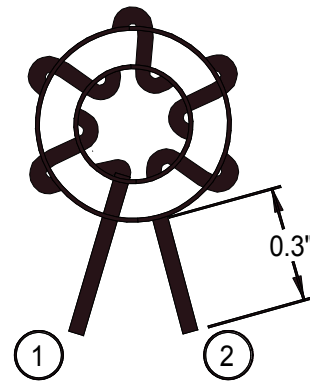


| COIL | TURNS | WIRE | TYPE | OV. INS | LEADS | ST | FIN | CT | STACK: | ELECTRICAL |
|------|-------|------|------------------|---------|-------|----|-----|----|-----------|------------------------|
| 1 | 6 | #18 | HEAVY UL CLASS B | | | 1 | 2 | | | L_o (OR L_M) 31uH |
| | | | | | | | | | IMP: NONE | HP: |
| | | | | | | | | | FIN: | PRIM V: |
| | | | | | | | | | MECH: | FREQ: |



INSTRUCTIONS:

1. WIND COIL 1: 6T #18 HEAVY UL CLASS B WIRE.
2. CUT LEADS AS SHOWN.
3. STRIP & TIN LEADS WITH SAC305 OR SAC405 JESD97 CLASS e1 ALLOYS TO WITHIN 1/16" OF CORE.
4. MUST BE LEAD FREE AND RoHS COMPLIANT.

| | | | | |
|-----|-----|-------|---------|----|
| A | -- | JM | 7/26/06 | PB |
| REV | ECO | APPVD | DATE | BY |

PRODUCT EB-PFC'S



RO ASSOCIATES

| | | |
|------|---|------|
| 2 | WIRE: #18 GAUGE HEAVY UL CLASS B | |
| 1 | CORE: OF41303TC MAG. INC. | 2653 |
| ITEM | LIST OF MATERIALS FOR: GROUND CURRENT CHOKE | RO # |

| | |
|---------------|-----------|
| DATE 8/9/95 | BY G.T. |
| M-0430 | REV A |
| | PG 1 OF 1 |